




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H01J 27/08, 37/08		A1	(11) International Publication Number: WO 99/04409
			(43) International Publication Date: 28 January 1999 (28.01.99)
(21) International Application Number: PCT/GB98/02075		(81) Designated States: JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 14 July 1998 (14.07.98)			
(30) Priority Data: 9714990.0 16 July 1997 (16.07.97) GB		Published $\Delta$ With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(71) Applicant (for all designated States except US): APPLIED MATERIALS, INC. [US/US]; 3050 Bowers Avenue, Santa Clara, CA 95054 (US).			
(72) Inventor; and (75) Inventor/Applicant (for US only): WELLS, Stephen [GB/GB]; 20 Ravenscroft Court, North Parade, Horsham, West Sussex RH12 2RE (GB).			
(74) Agent: CROSS, Rupert, Edward, Blount; Boulton Wade Tennant, 27 Fumival Street, London EC4A 1PQ (GB).			

(54) Title: POWER CONTROL APPARATUS FOR AN ION SOURCE HAVING AN INDIRECTLY HEATED CATHODE

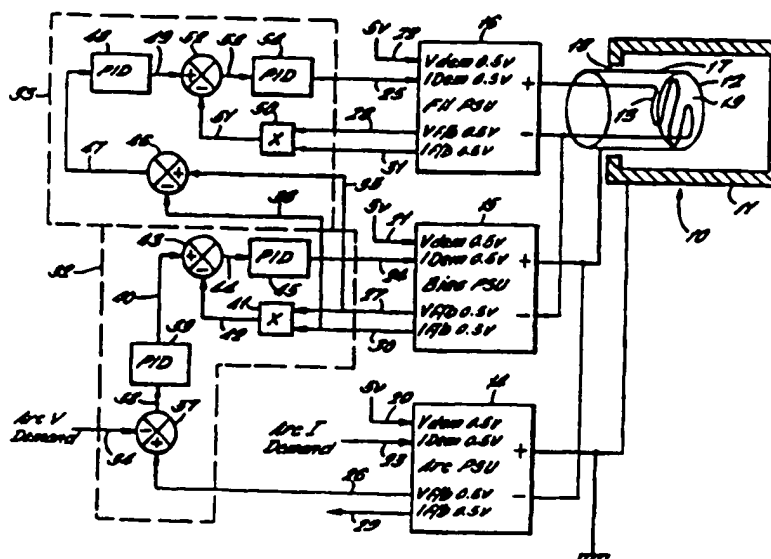

## (57) Abstract

In a power control apparatus for controlling power supply of an ion source having an indirectly heated cathode, the cathode bias power supply which provides a bias potential between the filament and cathode has an output that is effected by changes in impedance of the electron flow in the region between the filament and the cathode. Such impedance changes can arise due to changes in the chemistry of materials in this region, changes in gas pressure or physical changes, for example. A bias supply controller in the power control apparatus maintains the output power of the cathode bias power supply unit at a desired level, thus not effected by changes in impedance of the electron flow between the filament and the indirectly heated cathode.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	IJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

POWER CONTROL APPARATUS FOR AN ION SOURCE  
HAVING AN INDIRECTLY HEATED CATHODE

5           The present invention is concerned with power  
control apparatus for controlling the power supplies  
of an ion source having an indirectly heated cathode.

Hot cathode ion sources are well known and  
include for example the so called Freeman ion source  
10 and the so called Bernas ion source. These ion  
sources include a filament cathode which is directly  
heated by passing a current through the filament from  
a filament power supply. The ion source comprises an  
arc chamber containing the filament and to which a  
15 supply of gas or vaporised material is supplied. Once  
the cathode filament has been heated sufficiently with  
the filament current, thermionic electrons are emitted  
by the cathode. If the cathode is held at a  
substantial negative potential relative to an anode  
20 electrode in the arc chamber, a plasma is formed in  
the arc chamber with an arc current flowing between  
the cathode and the anode electrode. Typically, the  
anode electrode is in fact formed by the walls of the  
arc chamber.

25           In the plasma so formed in the arc chamber,  
molecules of the feedstock gas or vapour are ionised  
and these positive ions are extracted from the arc  
chamber through an aperture by an extraction electrode  
held at a negative potential relative to the arc  
30 chamber. The extracted ions may then be used to form  
an ion beam which may have a number of applications.  
One important application is in ion beam implantation  
where beams of ions of desired dopant materials are  
directed at semiconductor substrates (wafers) in order  
35 to implant the dopant in the semiconductor to provide

- 2 -

desired conductivity conditions.

A Freeman type ion source, especially for ion beam implantation apparatus, is disclosed in US-A-4578589. The Freeman ion source includes a filament power supply to provide a heating current through the cathode filament, and an arc power supply. US-A-4754200 discloses a method of controlling the power supplies to optimise performance of the ion source, especially in its application in an ion implantation apparatus.

US-A-5262652 discloses a Bernas-type ion source in an ion implanter application. Again the Bernas-type source has a directly heated cathode filament with a filament power supply to provide a heating current through the filament, and a separate arc power supply to provide a desired arc potential between the filament and the anode or arc chamber body.

The above mentioned US-A-4754200 discloses circuits for controlling the ion source power supplies. Thus, it is known to apply a constant arc voltage between the filament and the arc chamber body (or anode) and then to adjust the filament supply to achieve a desired arc current. It is also known to control the filament power supply by means of a power demand signal, i.e. to achieve an output power from the filament power supply in accordance with an input power demand signal, where the filament input power demand is derived from an error in the arc voltage, the arc current being held constant.

US-A-5497006 discloses an ion source of the Bernas-type, but with an indirectly heated cathode. In this arrangement, the cathode in the arc chamber of the source is formed of an electrically conductive button-like member which is indirectly heated from a

separate filament located behind the button on the opposite side relative to the main plasma chamber of the ion source. The source includes not only an arc power supply and a filament power supply, but also a cathode bias power supply which provides a required bias potential between the filament and the cathode button. In operation, the filament is biased negatively relative to the cathode button so that electrons thermionically emitted by the filament are accelerated to strike the rear face of the button, thereby heating the button cathode so that this cathode in turn emits electrons into the plasma chamber to initiate or maintain the plasma arc of the source.

This arrangement with an indirectly heated cathode in the ion source greatly extends the life of the ion source before it is necessary to change either the cathode itself or the cathode heater filament. The above form of ion source with an indirectly heated cathode will be referred to hereinafter as an indirectly heated cathode-type ion source as hereinbefore defined.

US-A-5497006 discloses an ion source having a filament power supply unit, a cathode bias power supply unit and an arc power supply unit, and a power control apparatus for controlling these power supplies. In the U.S. specification, programmable power supply units are used for each of these supplies. The arc power supply unit is controlled to provide an output arc voltage in accordance with an input voltage demand level. The bias voltage applied between the cathode button and the filament by the cathode bias power supply unit is set in accordance with the difference between a desired arc current and the measured current delivered to the arc by the arc

power supply, so as to minimise this difference.  
Thus, if the arc current is below the demand value,  
the cathode bias supply voltage is increased to  
increase the heating energy delivered to the cathode  
5 button, thereby to reduce the impedance of the plasma  
in the arc chamber and consequently to increase the  
arc current. The filament power supply in US'006, is  
in turn controlled to keep the current delivered by  
the cathode bias power supply equal to a desired level  
10 of current. Thus, the current from the cathode bias  
power supply is maintained at a required demand level  
by increasing or decreasing the voltage applied by the  
filament power supply to the filament.

The present invention sets out to improve the way  
15 in which the various power supplies of an indirectly  
heated cathode-type ion source are controlled, to  
improve stability, to maximise source life, and to  
provide quick response especially in terms of control  
of the plasma arc of the source.

20 According to one aspect of the invention, power  
control apparatus for controlling power supplies of an  
indirectly heated cathode-type ion source as  
hereinbefore defined, having a filament power supply  
unit, a cathode bias power supply unit and an arc  
25 power supply unit, comprises a bias supply controller  
responsive to a difference between a parameter of the  
arc power supply and a demand value of said parameter  
to produce a bias power demand signal representing an  
output power of the bias power supply unit required to  
30 minimise said difference and is further responsive to  
said bias power demand signal to maintain said output  
power of said bias power supply unit at said required  
power.

Because the bias supply controller operates to  
35 maintain the output power of the cathode bias power

supply unit at a required level, the power delivered to the cathode is not effected by changes in impedance of the cathode bias load, that is the impedance of the electron flow in the region between the filament and the indirectly heated cathode itself. Such impedance changes can arise due to changes in the chemistry of materials in this region, changes in gas pressure or physical changes, for example.

In prior art control arrangements, where for example, the output voltage of the cathode bias power supply is directly controlled, a change in the cathode bias load impedance produces a change in the cathode bias current, and therefore a change in the power delivered to the cathode from the cathode bias power supply unit. In the prior art arrangement disclosed in US-A-5497006, this change in cathode bias power must be compensated for by adjusting the filament power supply in order to return the cathode bias current to a required value. With this arrangement of the invention the output power of the cathode bias power supply unit is directly controlled to match a demand value, so that a change in bias load impedance does not require external compensation to keep the power delivered to the bias load at the demand value.

The arc power supply parameter used to produce a bias power demand signal may be either the output voltage or the output current of the arc power supply unit, depending whether the primary control input to the arc power supply unit is an arc current demand signal or an arc voltage demand signal. Conveniently, the above power control apparatus is used with a cathode bias power supply unit which provides a bias voltage feedback signal representing the output voltage of the supply unit and a bias current feedback signal representing the output current of the supply

unit, the bias supply controller then including a bias multiplier deriving a bias power feedback signal from the product of said bias voltage and bias current feedback signals, a bias power comparator deriving a bias power error signal from the difference between said bias power feedback signal and said bias power demand signal, and a bias power error conditioning filter, including an integrator, to condition said bias power error signal to apply as an output control signal to said cathode bias power supply unit, to control the output of the supply unit to reduce said bias power error signal. In this way, a relatively fast bias power control loop is formed which ensures that the output power supplied by the cathode bias power supply unit is maintained at the level determined by the bias power demand signal.

Also conveniently, said bias supply controller includes an arc parameter comparator deriving an arc parameter error signal from said difference between said arc parameter and said demand value of said arc parameter, and an arc parameter error conditioning filter, including an integrator, to condition said arc parameter error signal to provide said bias power demand signal.

The present invention also provides power control apparatus for controlling power supplies of an indirectly heated cathode-type ion source, as hereinbefore defined, having a filament power supply unit, a cathode bias power supply unit and an arc power supply unit, the apparatus comprising a filament supply controller responsive to an error in a parameter of the bias power supply relative to a desired value of said parameter to produce a filament power demand signal representing an output power of the filament power supply unit required to minimise



said error and is further responsive to said filament power demand signal to maintain said output power of said filament power supply unit at said required power.

5        This filament power supply controller may be used either together or independently of the bias supply controller described above. The above described filament supply controller provides the advantage of ensuring that the power delivered to the filament is  
10 directly controlled and is therefore independent of changes in filament impedance, which tends to rise during the life of the filament.

      In the example of the prior art described in US-A-5497006, only the output voltage of the filament  
15 power supply unit is controlled. As a result, an increase in the filament impedance produces a reduction in filament current and a corresponding reduction in the power delivered to the filament. No provision is made for internal compensation for this  
20 change in filament impedance to maintain filament power. Instead in the prior art U.S. specification, the reduction in filament power will presumably produce an increase in the cathode bias impedance producing in turn a reduction in cathode bias current  
25 which will eventually produce an increase in the voltage demand signal applied to the filament power supply to compensate. However, the control loop disclosed in the prior art U.S. patent requires a reduction in the cathode bias current, and therefore  
30 power delivery to the cathode, which can in turn effect the plasma arc in the main arc chamber of the ion source.

      The above apparatus may conveniently be used with a filament power supply unit which provides a filament  
35 voltage feedback signal representing the output

voltage of the filament supply unit and a filament current feedback signal representing the output current filament supply unit, the filament supply controller then including a filament multiplier  
5 deriving a filament power feedback signal from the product of said filament voltage and filament current feedback signals, a filament power comparator deriving a filament power error signal from the difference  
10 between said filament power feedback signal and said filament power demand signal, and a filament power conditioning filter including an integrator, to condition said filament power error signal to apply as an output control signal to said filament power supply unit to control the output of the supply unit to  
15 reduce said filament power error signal. Thus, there is provided an internal control loop which ensures the output power of the filament power supply is maintained at the demanded level.

The filament supply controller preferably  
20 includes a bias parameter error conditioning filter including an integrator to condition a bias parameter error signal to provide said filament power demand signal.

The bias power supply parameter used above may be  
25 the output voltage of said cathode bias power supply unit, in which case said error is the difference between said output voltage and a desired value of said output voltage. Instead the bias power supply parameter may be the output current of said cathode  
30 bias power supply unit, and then said error is the difference between said output current and a desired value of said output current.

Preferably, however, said bias power supply parameter is the impedance of the load supplied by the  
35 cathode bias power supply unit.

In a further aspect of the invention, there is provided power control apparatus for controlling power supplies of an indirectly heated cathode-type ion source as hereinbefore defined, having a filament power supply unit, a cathode bias power supply unit and an arc power supply unit, the apparatus comprising a filament supply controller responsive to a signal representing the impedance of the load supplied to the cathode bias power supply unit to adjust said filament supply to maintain said bias load impedance at a desired value. This filament supply controller may be used in combination with the above described bias supply controller, or independently.

By controlling the filament power supply to maintain the impedance of the cathode bias load constant, there is no need for a separate externally derived cathode command signal to provide control of the cathode bias load impedance. By maintaining the cathode bias load impedance substantially constant, even for variations in the required arc power, the gain in the power control loop for the cathode bias power supply can be kept more constant. Gain control and stability of the cathode bias power supply unit can be maintained up to maximum cathode bias power supply output. In practice, the controlled impedance value of the cathode bias load can be selected to match the maximum voltage and current output capability of the cathode bias power supply unit, so that full output capacity of the power supply can be utilised.

Thus, the above described apparatus may be used with a cathode bias power supply unit which provides a voltage feedback signal having a linear relationship to the output voltage to said load and a current feedback signal having a linear relationship to the

- 10 -

output current to said load, and in which said linear relationship are such that the ratio of the output voltage to the output current is equal to said desired value of the bias load impedance when the feedback voltage signal value is equal to the feedback current signal value. Then, said filament supply controller may be responsive to minimise the difference between said feedback signal values. For this, the filament supply controller may include an impedance comparator deriving a bias load impedance error signal from the difference between the voltage feedback signal and current feedback signal from the cathode bias power supply unit.

An example of the present invention will now be described with reference to the accompanying drawing which is a schematic diagram of an indirectly heated cathode-type ion source with separate filament, cathode bias and arc power supply units, and bias supply and filament supply controllers therefor.

Referring to the drawing, an ion source 10 is represented schematically. The ion source 10 may have the form of the indirectly heated cathode-type ion source as disclosed in the above referred US-A-5497006. Thus, the ion source 10 comprises an arc chamber 11 providing electrically conductive interior surfaces, an indirectly heated cathode element 12 and a separate filament 13.

An arc power supply unit 14 applies an arc potential between the cathode element 12 and the arc chamber wall 11, with the cathode member 12 biased negatively relative to the arc chamber wall 11. A cathode bias power supply unit 15 is connected to apply a cathode bias between the cathode member 12 and the filament 13, with the filament 13 biased negatively relative to the cathode member 12. A

- 11 -

filament power supply unit 16 provides a DC heating current through the filament 13.

5 The cathode member 12 may be constituted as a cylinder 17 extending through an aperture 18 in a wall of the arc chamber 11 and having an inner end closed by a "button" 19. The filament 13 is located within the cylinder 17 near but spaced from the inner face of the button 19.

10 In operation, the entire ion source structure 10 is in an evacuated region. A supply of a desired feedstock gas is delivered to the interior of the arc chamber 11. The filament power supply unit 16 is controlled to supply sufficient power to the filament 13 for this to emit electrons thermionically. The  
15 cathode bias supply unit 15 is controlled to accelerate these emitted electrons to strike and deliver energy to the adjacent surface of the button 19 of the cathode member 12. This energy delivered to the button member 19 effectively heats the button  
20 member of the cathode 12 the heating power delivered to the cathode 12 is mainly dependent on the power delivered by the bias power supply unit 15.

The cathode member 12 is heated sufficiently so as in turn to emit electrons into the interior of the  
25 arc chamber. These emitted electrons are in turn accelerated by the electric field produced by the arc power supply unit 14. Collisions between these accelerated electrons and molecules of the feedstock gas within the arc chamber 11 tend to ionise these  
30 molecules, increasing the number of available electrons and producing a plasma arc within the chamber 11. The arc power supply unit 14 controls the current flowing in the plasma in the chamber 11.

35 In practice, a magnetic field may be provided within the arc chamber 11 to concentrate the plasma in

a central region of the chamber. Arrangements for this purpose are well known in this art.

5 In order to function as an ion source, the arc chamber 11 has an aperture and ions created in the plasma within the arc chamber are extracted by an extraction electrode at a negative potential relative to the potential of the arc chamber 11. Again, arrangements for extracting ions from the arc chamber and producing a required ion beam are well known in  
10 this art and will not be described further here.

The arrangement described so far is similar to that disclosed in US-A-5497006.

Each of the power supply units 14, 15 and 16 is a programmable power supply having a voltage demand  
15 input 20, 21, 22, which can be set to control the maximum output voltage of the respective power supply unit. Also, each of the power supply units has a respective current demand input 23, 24, 25, which can be controlled to set the maximum output current of the  
20 respective power supply unit. Thus, each power supply unit will respond to voltage demand and current demand signals at its respective inputs, to provide an output voltage corresponding to the voltage demand input, provided this does not result in the output current  
25 exceeding the current demand input. In practice, the programmable power supply unit 14, 15 and 16 are normally employed in either controlled current or controlled voltage modes. In the attached drawing, the power supplies are shown operating in controlled  
30 current modes and each has its respective voltage demand input set at the highest possible input level. In this mode, each power supply operates to set an output voltage sufficient to provide the demanded input current.

35 The voltage demand and current demand input

signals to each of the power supply units can vary between zero volts, corresponding to zero output voltage or current as appropriate, and 5 volts, corresponding to full scale output voltage or current.

5 In the present case, the arc power supply unit has an output voltage range from zero to 150 volts with an output current range from zero to 7 amps; the cathode bias power supply unit 15 has an output voltage range from zero to 600 volts and an output current range

10 from zero to 2 amps, and the filament power supply unit 16 has an output voltage range from 0 to 7.5 volts and an output current range from zero to 80 amps.

Each of the power supply units 14, 15 and 16 also

15 provides a voltage feedback signal on a line 26, 27, 28, respectively and a current feedback signal on a line 29, 30 and 31 respectively. These feedback signals also have a voltage range between 0 and 5 volts corresponding to the full scale range of the

20 output voltage and current of the power supplies. Thus, when the cathode bias power supply unit 15 is delivering an output voltage of 600 volts and an output current of 2 amps, both the voltage feedback and the current feedback signals 27 and 30 are at 5

25 volts representing full scale.

The arc power supply unit 14 is controlled by an arc current demand signal (arc I demand) on current control input 23. The voltage control input 20 is set at full scale (5 volts). The cathode bias power

30 supply unit 15 receives a current demand signal on its current control input 24 from a bias supply controller 32. The voltage control input 21 of the cathode bias power supply unit 15 is set at full scale (5 volts). The current control input 25 of the filament power

35 supply unit 16 receives a current demand signal from a

- 14 -

filament supply controller 33. The voltage control input 22 of the filament power supply unit 16 is held at full scale (5 volts).

5 The bias supply controller 32 receives control inputs comprising an arc voltage demand signal (arc V demand) on a line 34 and the voltage feedback signal from the arc power supply unit 14 on line 26. The filament supply controller 33 receives control inputs comprising the voltage feedback signal 27 from the  
10 cathode bias power supply unit 15 on line 35 and the current feedback signal 30 from the bias power supply unit 15 on line 36.

In the arrangement illustrated in the drawing, the only external control signals received by the  
15 system are the arc voltage demand on line 34 and the arc current demand on input 23.

The bias supply controller 32 provides power demand control to the cathode bias power supply unit 15. As explained above, the arc power supply unit 14  
20 responds to the arc current demand on input 23 to provide sufficient output voltage from the power supply unit to produce an output current corresponding to the demanded current represented by arc I demand, so long as the voltage needed to produce this arc  
25 current is less than the full scale output voltage of the power supply unit, here 150 volts.

Assuming the ion source is operating with a plasma formed in the arc chamber 11, arc current can flow and the arc voltage required will depend on the  
30 impedance of the plasma. This output arc voltage on line 26 is compared in a comparator 37 with the required arc voltage represented by arc V demand on line 34. Any difference between the actual arc voltage and the required arc voltage produces an error  
35 signal on line 38, which is conditioned by a three



term (Proportional Integral Derivative - PID) filter 39. The PID filter 39 includes an integrating term and produces a signal on line 40 which functions as a power demand signal for the cathode bias power supply unit 15.

5 A current demand signal on control input 24 of the cathode bias power supply unit 15 controls the power supply to provide an output voltage sufficient to produce the demanded output current between the filament 13 and the cathode member 12 in the ion source, so long as the required output voltage of the bias power supply unit does not exceed the full scale output voltage, here 600 volts. The values of output voltage and output current produced by the cathode bias power supply unit 15 are represented by  
10 respective feedback signals on lines 27 and 30 connected to a multiplying unit 41 which produces a signal on line 42 representing the product of the output voltage and output current, that is the output power of the cathode bias power supply unit 15. This  
15 power signal on line 42 is compared in a comparator 43 with the power demand signal on line 40. A bias power error signal on line 44 corresponds to any difference between the actual power delivered by the power supply unit 15 and the demanded power represented by the  
20 signal on line 40. This error signal is then conditioned by a further PID filter 45, which also incorporates an integrator, to produce the current demand signal supplied to the current control input 24 of the power supply unit 15.  
25  
30

The feedback loop illustrated in bias supply controller 32, operates to maintain the output power of the cathode bias power supply unit 15 substantially equal to the demanded power on line 40, which is in  
35 turn dependent on the difference between the demanded

arc voltage and the actual arc voltage delivered by the arc power supply unit 14. As can be seen, the cathode bias power supply unit 15 has in effect an internal power control loop which serves to maintain the power delivered by the bias power supply unit 15 to the cathode bias load substantially constant, irrespective of possible changes in the impedance of this load, as may occur due to change in chemistry within the arc chamber of the ion source, changes in gas pressure, or physical changes in the cathode structure.

The PID filter 45 in the power control loop of the bias supply controller 32 can provide a very fast response since the cathode bias load, formed by the electron flow between the filament 13 and the button 19 of the cathode member 12, has no significant thermal inertia. As a result, the power control loop of the bias supply controller 32 ensures that the effective power delivered to the cathode responds very quickly both to any change in the cathode bias load impedance, and to any change in the power demand on line 40, resulting from a change in the arc parameters.

In this way, the arc in the plasma chamber (between the cathode member 12 and the plasma chamber walls 11) can be controlled accurately with a very short time constant.

As mentioned above, various changes in the ion source may result in changes in the cathode bias load impedance. The filament supply controller 33 operates to control the power delivered to the filament 13 so as to minimise any such variations in the cathode bias load impedance. However, because of the thermal inertia of the filament 13, the filament supply controller 33 operates with a relatively slower

response to maintain stability.

In the described example, the cathode bias power supply unit 15 is arranged so that the full scale output voltage of the supply unit divided by the full scale output current of the supply unit is equal to the desired cathode load impedance, corresponding to 300 ohms in the present example. Since the voltage and current feedback signals on lines 27 and 30 from the cathode bias power supply unit 15 provide full scale values of 5 volts corresponding to the above full scale voltage and current values, it can be seen that the load impedance on the cathode bias power supply unit 15 is always 300 ohms if the voltage feedback signal on line 27 is equal to the current feedback signal on line 30.

These current and voltage feedback signals are supplied on lines 35 and 36 to a comparator 46 in the filament supply controller 33. An error signal on line 47 corresponds to any difference between these current and voltage feedback signals, and therefore corresponds to an error in the load impedance of the cathode bias power supply unit 15, when this impedance differs from 300 ohms (in the present example). This error signal on the line 47 is supplied to a further PID filter 48 which includes an integrator and supplies on a line 49 a filament power demand signal.

The filament voltage feedback signal on line 28 and the filament current feedback signal on line 31 are supplied to a multiplier unit 50 in the filament supply controller 33, which produces a signal on a line 51 representing the product of the output voltage and output current of the filament power supply unit 16 and hence the power output of the supply 16. This power signal on line 51 is compared in a comparator 52 with the power demand signal on line 49. A signal

representing any difference between the actual power and the demanded power of the filament power supply unit 16 is supplied on a line 53 to a further PID filter 54 including an integrator, which produces a  
5 current demand signal for supply to the current control input 25 of the filament power supply unit 16.

In this way, the current supplied by the power supply unit 16 is adjusted so that the total power from the filament power supply unit 16 corresponds to  
10 the demanded power on line 49. This demanded power on line 49 in turn is such as to maintain the cathode bias load impedance at the predetermined constant value (here 300 ohms).

As mentioned above, the PID filters 48 and 54 in  
15 the filament supply controller 33 are arranged to be relatively slower acting, to match the time constant of the filament 13 resulting from the thermal inertia of the filament.

Importantly, any change in the impedance of the  
20 filament 13 is automatically compensated for by the internal power control loop in the filament supply controller 33.

Further, by controlling the filament power to maintain the cathode bias impedance constant, the  
25 cathode bias power supply unit 15 can operate over a wide output power range without saturating.

Importantly also, there is no need for any external control signals to the supply controllers in addition to arc V demand and arc I demand.

30 The above example of the invention has been described with reference to individual components such as comparators, PID filters and multipliers. However, the functions of both the bias supply controller 32 and the filament supply controller 33 can be embodied  
35 as a Digital Signal Processor suitably programmed to

provide the required functions as described above.

Although in the above example the arc power supply unit 14 receives an arc current demand signal on current control input 23 and the resulting arc voltage is then compared with the arc voltage demand signal in a comparator 37 of the bias supply controller 32, these two operations could be reversed. Thus, the arc voltage demand could be supplied directly to the voltage control input 20 of the arc power supply unit 14, with the current control input 23 held at the full scale 5 volts. Then the current feedback signal on line 29 is compared with the arc current demand to control the cathode bias supply unit 15.

Similarly, although the above described example has the current control input 24 of the cathode bias power supply unit 15 controlled by the bias supply controller 32, and the voltage control input 21 held at full scale 5 volts, these two controls could be reversed so that the current control input is held at 5 volts and the control input from the bias supply controller 32 is supplied to the voltage control input 21.

Again the control inputs 22 and 25 of the filament power supply unit 16 could also be reversed.

- 20 -

CLAIMS:

1. Power control apparatus for controlling power supplies of an indirectly heated cathode-type ion source, the apparatus comprising a bias supply controller responsive to a difference between a parameter of the arc power supply and a demand value of said parameter to produce a bias power demand signal representing an output power of the cathode bias power supply unit required to minimise said difference and is further responsive to said bias power demand signal to maintain said output power of said cathode bias power supply unit at said required power.
2. Apparatus as claimed in Claim 1, wherein said arc power supply parameter is the output voltage of said arc power supply unit.
3. Apparatus as claimed in Claim 1, wherein said arc power supply parameter is the output current of said arc power supply unit.
4. Apparatus as claimed in any preceding claim for use with a cathode bias power supply unit which provides a bias voltage feedback signal representing the output voltage of the supply unit and a bias current feedback signal representing the output current of the supply unit, wherein the bias supply controller includes a bias multiplier deriving a bias power feedback signal from the product of said bias voltage and bias current feedback signals, a bias power comparator deriving a bias power error signal from the difference between said bias power feedback signal and said bias power demand signal, and a bias

power error conditioning filter, including an integrator, to condition said bias power error signal to apply as an output control signal to said cathode bias power supply unit, to control the output of the supply unit to reduce said bias power error signal.

5  
10  
15  
5. Apparatus as claimed in any preceding claim, wherein said bias supply controller includes an arc parameter comparator deriving an arc parameter error signal from said difference between said arc parameter and said demand value of said arc parameter, and an arc parameter error conditioning filter, including an integrator, to condition said arc parameter error signal to provide said bias power demand signal.

20  
25  
6. Apparatus as claimed in any preceding claim, wherein the apparatus further comprises a filament supply controller responsive to an error in a parameter of the bias power supply relative to a desired value of said parameter to produce a filament power demand signal representing an output power of the filament power supply unit required to minimise said error and is further responsive to said filament power demand signal to maintain said output power of said filament power supply unit at said required power.

30  
35  
7. Power control apparatus for controlling power supplies of an indirectly heated cathode-type ion source, as hereinbefore defined, having a filament power supply unit, a cathode bias power supply unit and an arc power supply unit, the apparatus comprising a filament supply controller responsive to an error in a parameter of the bias power supply relative to a desired value of said parameter to produce a filament

- 22 -

power demand signal representing an output power of the filament power supply unit required to minimise said error and is further responsive to said filament power demand signal to maintain said output power of said filament power supply unit at said required power.

8. Apparatus as claimed in either of Claims 6 or 7, for use with a filament power supply unit which provides a filament voltage feedback signal representing the output voltage of the filament supply unit and a filament current feedback signal representing the output current of the filament supply unit, wherein the filament supply controller includes a filament multiplier deriving a filament power feedback signal from the product of said filament voltage and filament current feedback signals, a filament power comparator deriving a filament power error signal from the difference between said filament power feedback signal and said filament power demand signal, and a filament power conditioning filter including an integrator, to condition said filament power error signal to apply as an output control signal to said filament power supply unit to control the output of the supply unit to reduce said filament power error signal.

9. Apparatus as claimed in any of Claims 6 to 8, wherein said filament supply controller includes a bias parameter error conditioning filter, including an integrator, to condition a bias parameter error signal to provide said filament power demand signal.

10. Apparatus as claimed in any of Claims 6 to 9, wherein said bias power supply parameter is the output




voltage of said cathode bias power supply unit, and said error is the difference between said output voltage and a desired value of said output voltage.

- 5 11. Apparatus as claimed in any of Claims 6 to 9, wherein said bias power supply parameter is the output current of said cathode bias power supply unit, and said error is the difference between said output current and a desired value of said output current.
- 10 12. Apparatus as claimed in any of Claims 6 to 9, wherein said bias power supply parameter is the impedance of the load supplied by the cathode bias power supply unit.
- 15 13. Apparatus as claimed in any of Claims 1 to 5, wherein the apparatus further comprises a filament supply controller responsive to a signal representing the impedance of the load supplied by the cathode bias power supply unit to adjust said filament supply to maintain said bias load impedance at a desired value.
- 20 14. Power control apparatus for controlling power supplies of an indirectly heated cathode-type ion source, as hereinbefore defined, having a filament power supply unit, a cathode bias power supply unit and an arc power supply unit, the apparatus comprising a filament supply controller responsive to a signal representing the impedance of the load supplied by the cathode bias power supply unit to adjust said filament supply to maintain said bias load impedance at a desired value.
- 30 15. Apparatus as claimed in any of Claims 12 to 14, for use with a cathode bias power supply unit which
- 35

- 24 -

provides a voltage feedback signal having a linear relationship to the output voltage to said load and a current feedback signal having a linear relationship to the output current to said load, and in which said linear relationships are such that the ratio of the output voltage to the output current is equal to said desired value of the bias load impedance when the feedback voltage signal value is equal to the feedback current signal value, wherein said filament supply controller is responsive to minimise the difference between said feedback signal values.

16. Apparatus as claimed in Claim 15, wherein the filament supply controller includes an impedance comparator deriving a bias load impedance error signal from the difference between the voltage feedback signal and the current feedback signal from the cathode bias power supply unit.

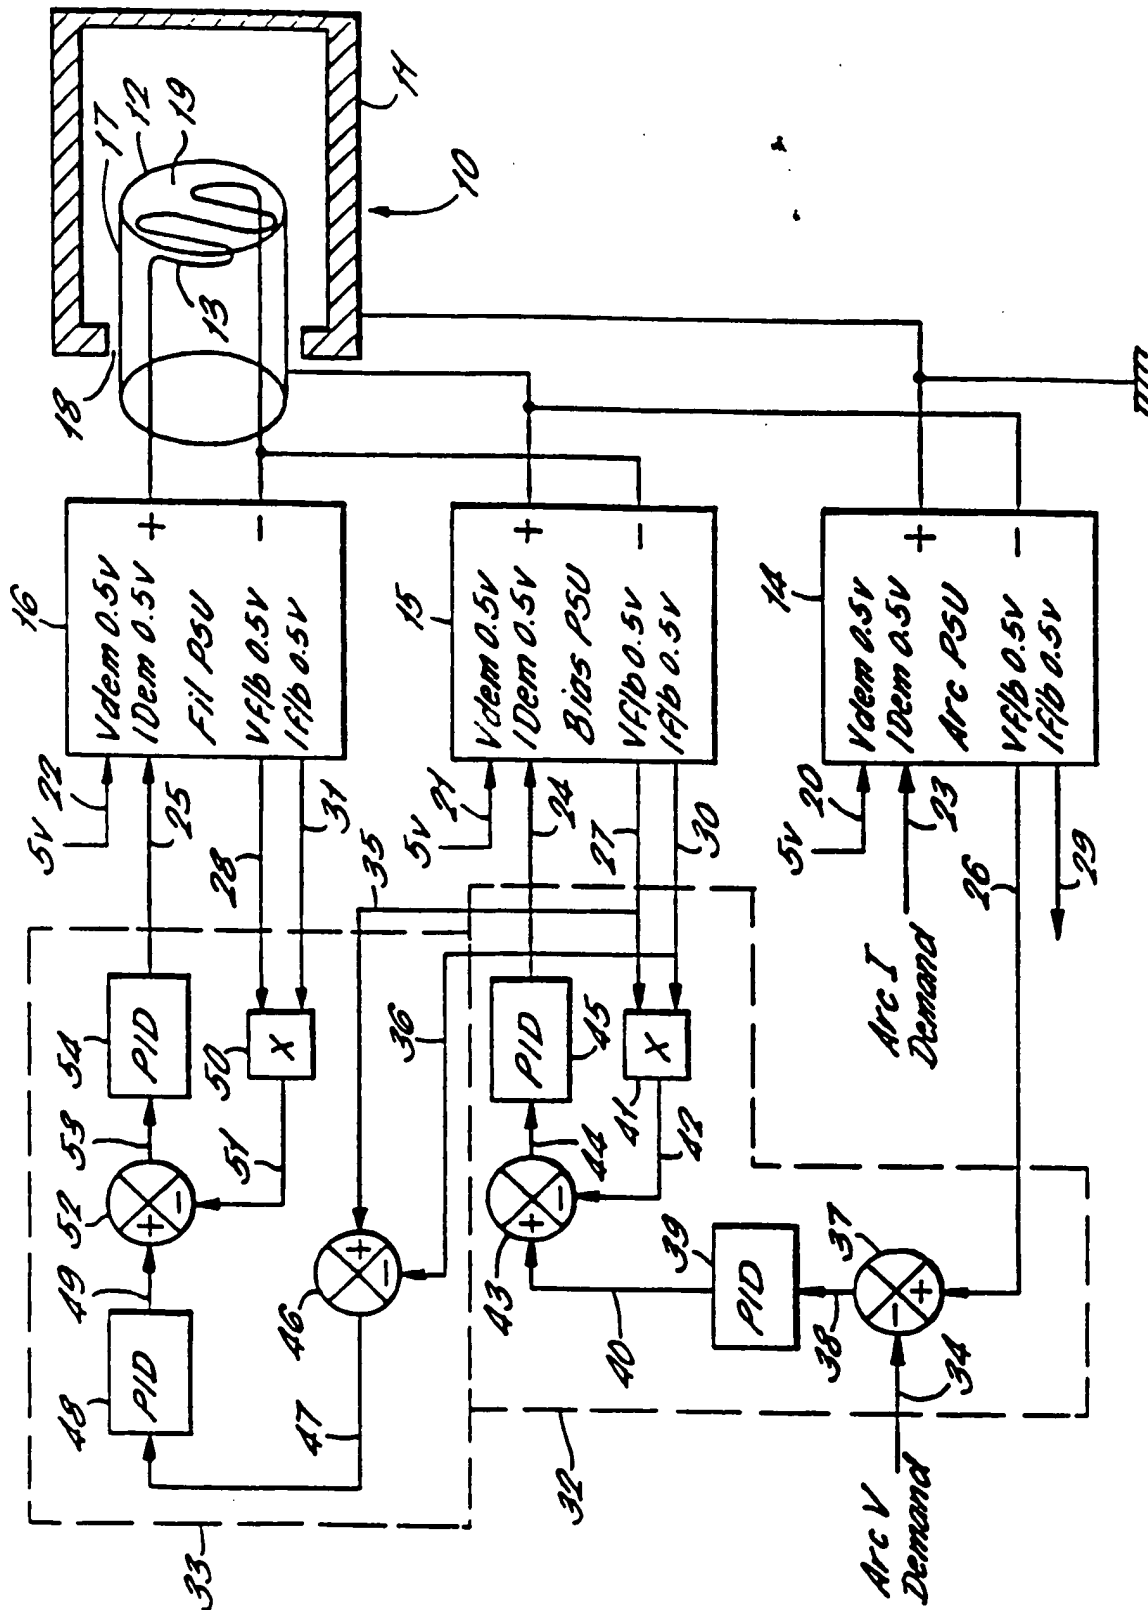

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/02075

A CLASSIFICATION OF SUBJECT MATTER  
IPC o H01J27/08 H01J37/08

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
A	US 5 497 006 A (SFERLAZZO ET AL.) 5 March 1996 cited in the application see figure 6 ---	1-16
A	US 4 754 200 A (PLUMB ET AL.) 28 June 1988 cited in the application ---	
A	US 4 506 160 A (SUGAWARA ET AL.) 19 March 1985 see the whole document ---	
A	US 3 909 663 A (THOMAS ET AL.) 30 September 1975 see abstract: figure 1 ---	
A	US 5 097 179 A (TAKAYAMA) 17 March 1992 -----	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### Special categories of cited documents

- A\* document defining the general state of the art which is not considered to be of particular relevance
- E\* earlier document but published on or after the international filing date
- L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- O\* document referring to an oral disclosure, use, exhibit or other means
- P\* document published prior to the international filing date but later than the priority date claimed

- T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- Z\* document member of the same patent family

Date of the actual completion of the international search

5 November 1998

Date of mailing of the international search report

18/11/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel: (+31 70) 340-2040, Tx: 31 551 eppo.nl  
Fax: (+31-70) 340-3016

Authorized officer

Frisch, K

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/02075

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5497006 A	05-03-1996	CA 2162748 A	16-05-1996
		EP 0713239 A	22-05-1996
		JP 8227688 A	03-09-1996
US 4754200 A	28-06-1988	EP 0215626 A	25-03-1987
		JP 1856238 C	07-07-1994
		JP 62143353 A	26-06-1987
		US 4743767 A	10-05-1988
US 4506160 A	19-03-1985	JP 5820444 A	29-11-1983
		JP 58214250 A	13-12-1983
		DE 3374488 A	17-12-1987
		EP 0095311 A	30-11-1983
US 3909663 A	30-09-1975	DE 2325786 A	19-12-1974
US 5097179 A	17-03-1992	JP 2750465 B	13-05-1998
		JP 3225726 A	04-10-1991
		JP 3233835 A	17-10-1991